



High Pressure Equipment

40,000 psi High Pressure Valves

High Pressure (coned & threaded) type connections for $\frac{9}{16}$ " O.D. tubing.

Non-rotating tip stems are standard for on-off service and insure long life on valve seats. Regulating tip stems are available for all valves at no additional cost, add - REG to part number.


Glands and collars for tubing are supplied with each valve unless otherwise requested (glands and collars shown on pages 4.8 and 4.A).

Materials include high tensile type 316 stainless steel bodies and hardened 17-4PH stainless steel lower section stems.

Packing set consists of multiple Teflon packing with nylon back up, with optional Viton (350°F), BUNA-N (200°F) and Grafoil (800°F) available at no additional cost.

Air operators for remote control operation are available for all valves. (Select required valve and add "HIPCO". Refer to section 7.0 for additional data).


High temperatures can be accommodated using extended stuffing boxes (see page 6.4).

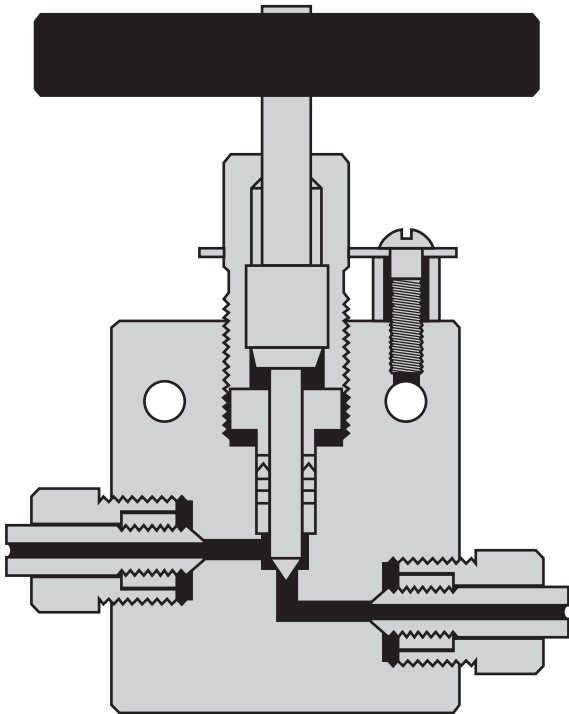

Valve Features


- Non-rotating stem tips
- Packing below stem threads
- Type 316 ss high tensile bodies
- Positive gland lock device
- No stem adjustment needed
- Black T-handles or choice of 4 colors

40,000 psi High Pressure Valves




Two Way Straight Valves

| Tubing | Catalog No. | psi | Connection | Orifice | D | E | F | G | H | J | K | L | Thickness |
|------------|-------------|--------|------------|---------|--------|--------|----|---------|--------|------|--------|-------|-----------|
| 9/16" O.D. | 40-11HF9 | 40,000 | HF9 | 1/8" | 5 5/8" | 2 5/8" | 1" | 1 7/16" | 2 7/8" | 1/2" | 1 5/8" | 7/32" | 1 1/2" |




Two Way Angle Valves

| Tubing | Catalog No. | psi | Connection | Orifice | D | E | F | G | H | J | K | L | Thickness |
|------------|-------------|--------|------------|---------|--------|--------|---|---------|--------|------|--------|-------|-----------|
| 9/16" O.D. | 40-12HF9 | 40,000 | HF9 | 1/8" | 5 5/8" | 2 5/8" | — | 1 7/16" | 2 7/8" | 1/2" | 1 5/8" | 7/32" | 1 1/2" |




Three Way Valves / Two Pressure Connections

| Tubing | Catalog No. | psi | Connection | Orifice | D | E | F | G | H | J | K | L | Thickness |
|------------|-------------|--------|------------|---------|---------|--------|---------|---------|---------|------|--------|-------|-----------|
| 9/16" O.D. | 40-13HF9 | 40,000 | HF9 | 1/8" | 6 1/16" | 2 5/8" | 1 7/16" | 1 7/16" | 3 5/16" | 1/2" | 1 5/8" | 7/32" | 1 1/2" |




Three Way Valves / One Pressure Connection

| Tubing | Catalog No. | psi | Connection | Orifice | D | E | F | G | H | J | K | L | Thickness |
|------------|-------------|--------|------------|---------|--------|--------|---------|---------|--------|------|--------|-------|-----------|
| 9/16" O.D. | 40-14HF9 | 40,000 | HF9 | 1/8" | 5 5/8" | 2 5/8" | 1 7/16" | 1 7/16" | 2 7/8" | 1/2" | 1 5/8" | 7/32" | 1 1/2" |



Three Way / Two Stem Connection Valves

| Tubing | Catalog No. | psi | Connection | Orifice | D | E | F | G | H | J | K | L | Thickness |
|------------|-------------|--------|------------|---------|--------|--------|---------|---------|--------|------|--------|-------|-----------|
| 9/16" O.D. | 40-15HF9 | 40,000 | HF9 | 1/8" | 9 7/8" | 2 5/8" | 2 3/16" | 1 7/16" | 4 3/8" | 1/2" | 3 3/8" | 7/32" | 1 1/2" |



Replaceable Seat Valves

| Tubing | Catalog No. | psi | Connection | Orifice | D | E | F | G | H | J | K | L | Thickness |
|------------|-------------|--------|------------|---------|--------|--------|---|---------|--------|------|--------|-------|-----------|
| 9/16" O.D. | 40-12HF9-R | 40,000 | HF9 | 1/8" | 6 3/8" | 2 5/8" | — | 1 7/16" | 2 7/8" | 1/2" | 1 5/8" | 7/32" | 1 1/2" |