




## High Pressure Equipment

### Ball Check Valves

Ball type check valves insure flow in one direction only. Material for bodies and covers is 316 stainless steel (30-41HF16 body and cover are 17-4PH). Standard tubing glands and collars are provided unless otherwise specified.

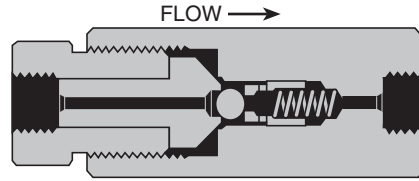

| Catalog No. | psi    | Connections                    | Length            | Hex                            |
|-------------|--------|--------------------------------|-------------------|--------------------------------|
| 40-41HF9    | 40,000 | $\frac{9}{16}$ " HIGH PRESSURE | $5\frac{1}{8}$ "  | $1\frac{1}{2}$ "               |
| 60-41HF2    | 60,000 | $\frac{1}{8}$ " HIGH PRESSURE  | $4\frac{3}{16}$ " | $1\frac{1}{2}$ "               |
| 60-41HF4    | 60,000 | $\frac{1}{4}$ " HIGH PRESSURE  | $4\frac{1}{4}$ "  | $1\frac{1}{2}$ "               |
| 60-41HF6    | 60,000 | $\frac{3}{8}$ " HIGH PRESSURE  | $4\frac{5}{8}$ "  | $1\frac{1}{2}$ "               |
| 60-41HF9    | 60,000 | $\frac{9}{16}$ " HIGH PRESSURE | $5\frac{1}{8}$ "  | $1\frac{1}{2}$ "               |
| 30-41HF16   | 30,000 | 1" HIGH PRESSURE               | $6\frac{1}{2}$ "  | $2\frac{1}{2}$ " RD with flats |